


GLASS BOTTOM SLIDE

AGLABTSL10-A-9BS

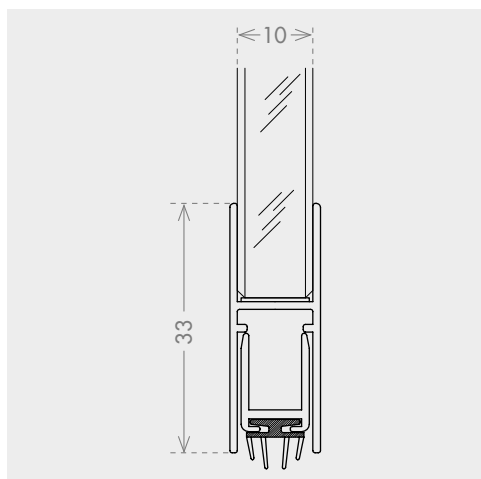

ITEM SIZE (mm)

12 x 33

GLASS WIDTH (mm)

10

AVAILABLE LENGTHS (mm)

330 - 430 - 530 - 630 - 730 - 830 - 930 - 1030 - 1130 -
1230 - 1330 - 1430 - 1530 - 1630 - 1730 - 1830

MATERIALS

EXTERNAL PROFILE 6060 T6 aluminium alloy

INTERNAL PROFILE 6060 T6 aluminium alloy

AVAILABLE FINISHING Silver anodised, stainless steel, scotch brite, black anodised

MECHANISMS Nylon PA6 30% Fiberglass reinforced

SEAL A. Four lips co-extruded self-extinguishing thermoplastic seal. Color: black

CLOSING END-CAP Included. Nylon PA6 30% Fiberglass reinforced. Color: black

ACTIVATION PLUNGER 9BS. Activation lever on floor guide side, adjustable with a 3 mm Allen wrench.

TECHNICAL CHARACTERISTICS

MAXIMUM DROP (mm) 14

WORKING TEMPERATURES (C°) -20° / +80°

FIXING TYPE 6F. High-sealing double-sided tape (supplied with the product)

CERTIFICATES

WORKING CYCLES > 200.000 (internal test)

ACOUSTIC INSULATION /

FIRE RESISTANCE /

SMOKE TESTED /



GLASS BOTTOM SLIDE

AGLABTSL10-A-9BS

ITEM LENGTH mm	ITEM WEIGHT Kgs	BOX WEIGHT Kgs	MAX TRIMMING mm	TRIMMING from -> to mm
330	0,127	4,66	50	330 -> 280
430	0,165	5,80	100	430 -> 330
530	0,203	6,94	150	530 -> 380
630	0,241	8,08	150	630 -> 480
730	0,279	9,22	150	730 -> 580
830	0,317	10,36	150	830 -> 680
930	0,355	11,50	150	930 -> 780
1030	0,393	12,64	150	1030 -> 880
1130	0,431	13,78	150	1130 -> 980
1230	0,469	14,92	150	1230 -> 1080
1330	0,507	16,06	150	1330 -> 1180
1430	0,545	/	150	1430 -> 1280
1530	0,583	/	150	1530 -> 1380
1630	0,621	/	150	1630 -> 1480
1730	0,659	/	150	1730 -> 1580
1830	0,697	/	150	1830 -> 1680

PACKAGING

MINIMUM PACKAGING 1 piece in nylon bag

BOX PACKAGING 30 pieces (except where noted)

ITEM AND PACKAGING CARE

Keep the items inside their original packaging. Keep the boxes in horizontal position, do not bend or overlap heavy weights.

Keep stored in a dry place, protected from water, solvents and direct sunlight.

