


CON ALETTE

ASAL-A-1

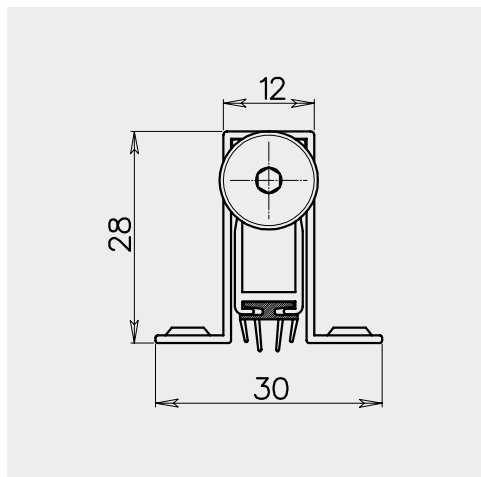

ITEM SIZE (mm)

12 (30) x 28

GROOVE SIZE (mm)

12,1 x 28

AVAILABLE LENGTHS (mm)

330 - 430 - 530 - 630 - 730 - 830 - 930 - 1030 - 1130 -
1230 - 1330 - 1430 - 1530 - 1630 - 1730 - 1830

MATERIALS

EXTERNAL PROFILE 6060 T6 aluminium alloy

INTERNAL PROFILE 6060 T6 aluminium alloy

AVAILABLE FINISHING Mill

MECHANISMS Nylon PA6 30% Fiberglass reinforced

SEAL A. Four lips co-extruded self-extinguishing thermoplastic seal. Color: black

CLOSING END-CAP Included. Nylon PA6 30% Fiberglass reinforced. Color: black.

ACTIVATION PLUNGER 1. Self directing articulated metal plunger with nylon cap, adjustable with 3mm Allen wrench.
Nylon PA6 30% Fiberglass reinforced. Color: black.

TECHNICAL CHARACTERISTICS

MAXIMUM DROP (mm) 14

WORKING TEMPERATURES (C°) -20° / +80°

FIXING TYPE 5F. Fixing screws on the lateral wings of the aluminium profile

CERTIFICATES

WORKING CYCLES > 200.000 (internal test)

ACOUSTIC INSULATION /

FIRE RESISTANCE /

SMOKE TESTED /



CON ALETTE

ASAL-A-1

ITEM LENGTH mm	ITEM WEIGHT Kgs	BOX WEIGHT Kgs	MAX TRIMMING mm	TRIMMING from -> to mm
330	0,143	6,42	50	330 -> 280
430	0,187	8,18	135	430 -> 295
530	0,231	9,94	200	530 -> 330
630	0,275	11,70	200	630 -> 430
730	0,319	13,46	200	730 -> 530
830	0,363	15,22	200	830 -> 630
930	0,407	16,98	200	930 -> 730
1030	0,451	18,74	200	1030 -> 830
1130	0,495	20,50	200	1130 -> 930
1230	0,539	22,26	200	1230 -> 1030
1330	0,583	24,02	200	1330 -> 1130
1430	0,627	/	200	1430 -> 1230
1530	0,671	/	200	1530 -> 1330
1630	0,715	/	200	1630 -> 1430
1730	0,759	/	200	1730 -> 1530
1830	0,803	/	200	1830 -> 1630

PACKAGING

MINIMUM PACKAGING 5 pieces

BOX PACKAGING 40 pieces (except where noted)

ITEM AND PACKAGING CARE

Keep the items inside their original packaging. Keep the boxes in horizontal position, do not bend or overlap heavy weights.

Keep stored in a dry place, protected from water, solvents and direct sunlight.

