


APPLIQUE

ASAPP-A-9B

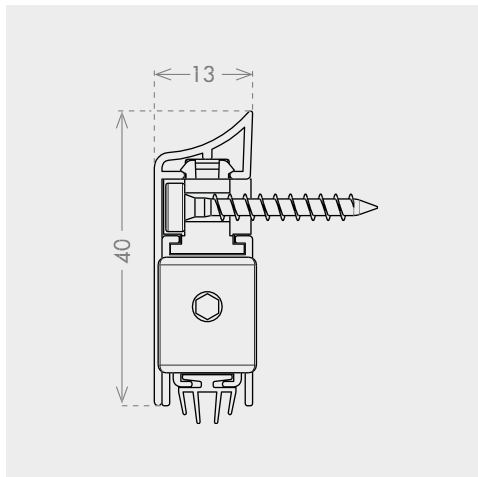

ITEM SIZE (mm)

13 x 40

GROOVE SIZE (mm)

Face-mounted

AVAILABLE LENGTHS (mm)

330 - 430 - 530 - 630 - 730 - 830 - 930 - 1030 - 1130 -
1230 - 1330 - 1430 - 1530

MATERIALS

EXTERNAL PROFILE 6060 T6 aluminium alloy

INTERNAL PROFILE 6060 T6 aluminium alloy

AVAILABLE FINISHING White RAL9010, Brown RAL8017, Silver anodized

MECHANISMS Nylon PA6 30% Fiberglass reinforced

SEAL A. Four lips co-extruded self-extinguishing thermoplastic seal. Color: black

**CLOSING END-CAP
+ ACTIVATOR** Included. Nylon PA6 30% Fiberglass reinforced. Color: grey.

ACTIVATION PLUNGER 9B. Nylon clad steel plunger, adjustable with a 3mm allen wrench. Color: grey.

TECHNICAL CHARACTERISTICS

MAXIMUM DROP (mm) 14

WORKING TEMPERATURES (C°) -20° / +80°

FIXING TYPE 3F. with frontal screws, removing the cover (screws included).

CERTIFICATES

WORKING CYCLES > 200.000 (internal test)

ACOUSTIC INSULATION /

FIRE RESISTANCE /

SMOKE TESTED /



APPLIQUE

ASAPP-A-9B

ITEM LENGTH mm	ITEM WEIGHT Kgs	BOX WEIGHT Kgs	MAX TRIMMING mm	TRIMMING from -> to mm
330	0,172	5,000	20	330 -> 310
430	0,225	6,325	120	430 -> 310
530	0,278	7,650	150	530 -> 380
630	0,331	8,975	150	630 -> 480
730	0,384	10,300	150	730 -> 580
830	0,437	11,625	150	830 -> 680
930	0,490	12,950	150	930 -> 780
1030	0,543	14,275	150	1030 -> 880
1130	0,596	15,600	150	1130 -> 980
1230	0,649	16,925	150	1230 -> 1080
1330	0,702	18,250	150	1330 -> 1180
1430	0,755	/	150	1430 -> 1280
1530	0,808	/	150	1530 -> 1380

PACKAGING

MINIMUM PACKAGING 1 piece in nylon bag

BOX PACKAGING 25 pieces (except where noted)

ITEM AND PACKAGING CARE

Keep the items inside their original packaging. Keep the boxes in horizontal position, do not bend or overlap heavy weights.

Keep stored in a dry place, protected from water, solvents and direct sunlight.

