

Art that
FIGHTS
fire

Technical Data Sheet
BRD - EI₂ 90

meverin[®]
F I R E D O O R S

EN FF C EI₂ 90
MAGNUM BRD
LARGE SWING DOOR
1-2 LEAVES



EN FF CE EI₂ 90 MAGNUM BRD LARGE SWING DOOR 1-2 LEAVES

TECHNICAL FEATURES

Frame

Combination of a pair of sheet metal profiles made to measure designed to support significant **radial loads** and designed for **fixing by means of dowels** (not included) to the load-bearing structure in masonry or insulated and protected metal structure.

Leaf

Single bloc leaf made of press-folded panels in zinc-plated steel sheet with programmed deformability coupled mechanically, where the size requires it. No Sill. **New** MEV FIRUX[®] internal **insulation pack** (patented) resistant to high temperatures.

FIRUX[®] type intumescent fire seal

Placed on the vertical sides of the frame, on the lower and upper crosspieces of the leaves and in correspondence with the meeting stile.

Cold Smoke Gaskets Sa (optional)

NEW: Cold Smoke Gaskets Sa placed on the profile of the frame (provided on the rebate in the case of two leaves; applied on the perimeter of the frame in the case of a pedestrian door).

NEW: There is the possibility of installing the Sa KIT, as an integration, even at a later time.

Handle

Accident-prevention handle made in stainless steel with double lever with return spring. Handle height = 1050 mm.

Self-latching lock

Primary (mobile) leaf with lock complete with passing cylinder.

Secondary (fixed) leaf with **"self-latching" lock** for leaf overhead self-latching.

Operation (self-closing)

Closing by means of a **large hydraulic door closer; adjustment of the opening effort, the closing speed and the latching speed**. For larger dimensions, additional **RETURN SPRING hinge** with adequate force to strengthen door closer. **Automatic closing**, by means of the aforementioned devices, is guaranteed for a maximum opening of 179°.

Pedestrian door (optional)

NEW: Possibility of inserting a pedestrian door

	Door dimensions			Pedestrian passage dimensions	
	LT (1 leaf)	LT (2 leaves)	HT	LNp	HNp
Pedestrian door	1490	2812	2290	850	2000
without threshold	1780	3364	2290	1140	2000

The measurements are expressed in mm.

For lower LTs ask for feasibility.

If the HT height is lower than the measurements listed above, the height of the pedestrian door is reduced (HNp)

Hinges (patented)

3 for each door, ground to support heavy radial loads.

Compulsory accessories for each leaf

- 1 door closer and 1 RETURN SPRING hinge for large dimensions.
- 1 door closer regulator for the correct closing sequence of the leaves for double leaf doors.

Applications

- Surface mounted on solid and load-bearing masonry or reinforced concrete wall.
- Lintel mounted or mounted on an insulated structure finished with plaster-board.

Structural calculations at client's responsibility.

Door to be installed indoors and not subject to drafts.

Finish

The doors are made of **zinc-plated sheet metal** and finished with an ecological primer paint, of industrial type, with high quality epoxy resins, which guarantee protection against corrosion from a vast range of aggressive agents, acid and non-acid, in environments not directly exposed to the outdoor natural atmosphere. Standard color RAL 7035. The full range of RAL and NCS is available on order.

NEW: Made of AISI 304 or 316 stainless steel (excluding accessories and the lower hinge adjustment screw).

Identification plate

Applied on the shell handle with the appropriate CE mark and with personalized polychrome CARD with identification data.

Documentation provided (CE marking)

Composed by:

- declaration of Performance (DoP) according to UNI EN 16034 and 13241
- declaration of conformity with machinery directive
- installation, use and maintenance manual
- installation instructions

EI₂ 90 LEAF weight and thickness

- Average nominal weight 51 kg/m² wall opening
- Nominal thickness 100 mm
- Average nominal weight 56 kg/m² wall opening
- Nominal thickness 120 mm


EI₂ 90 field of application with CE marking

	BRD 1 leaf EI ₂ 90		BRD 2 leaves EI ₂ 90	
	LT	HT	LT	HT
Maximum dimensions	3337 mm	3347 mm	5940 mm	4237 mm
Maximum surface	9,17 mq		22,02 mq	
Decreasing dimensions	1458 mm	2117 mm	1458 mm	2117 mm

EN FF CE EI₂ 90 MAGNUM BRD LARGE SWING DOOR 1-2 LEAVES


ACCESSORIES

- A. SELECTOR
- B. RETURN SPRING
- C. DOOR CLOSER

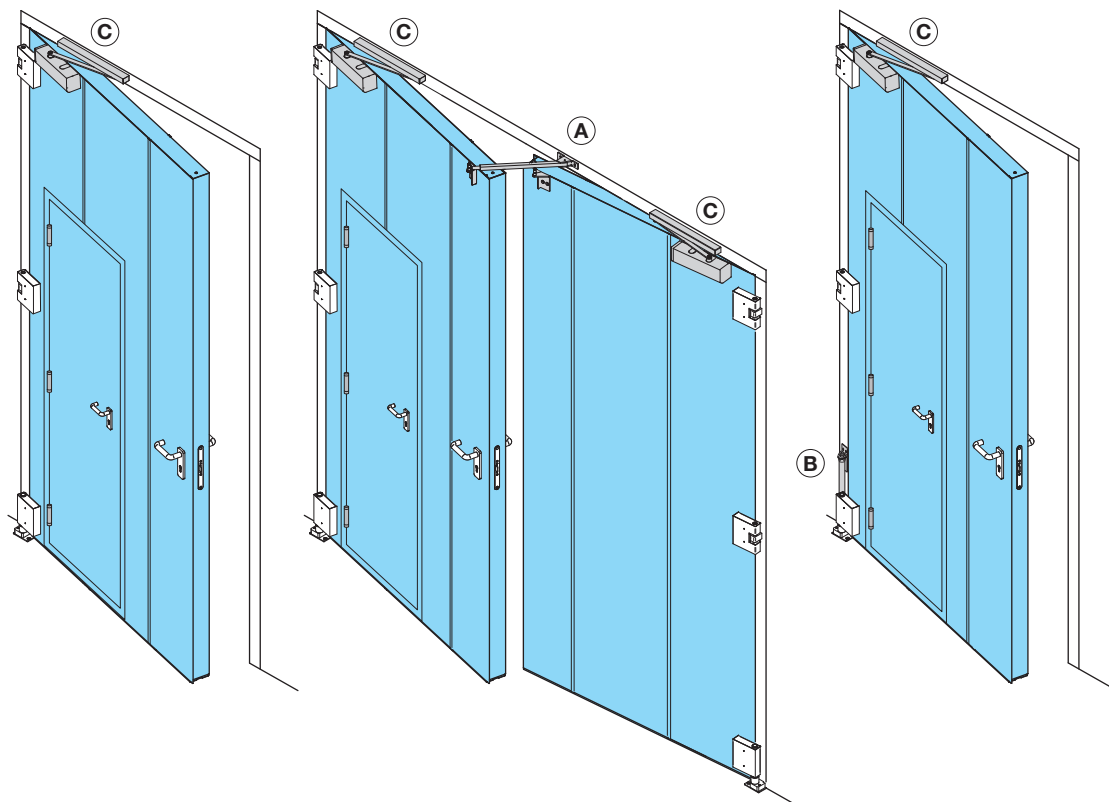


SELECTOR (A)

Front view of closed door with selector.
Accessory provided in the double-leaf door.

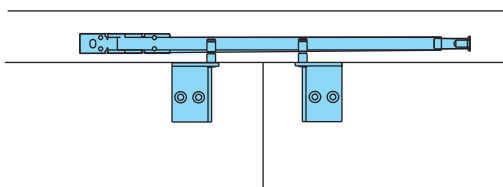


RETURN SPRING (B)

Optional accessory. Maximum opening 179°.

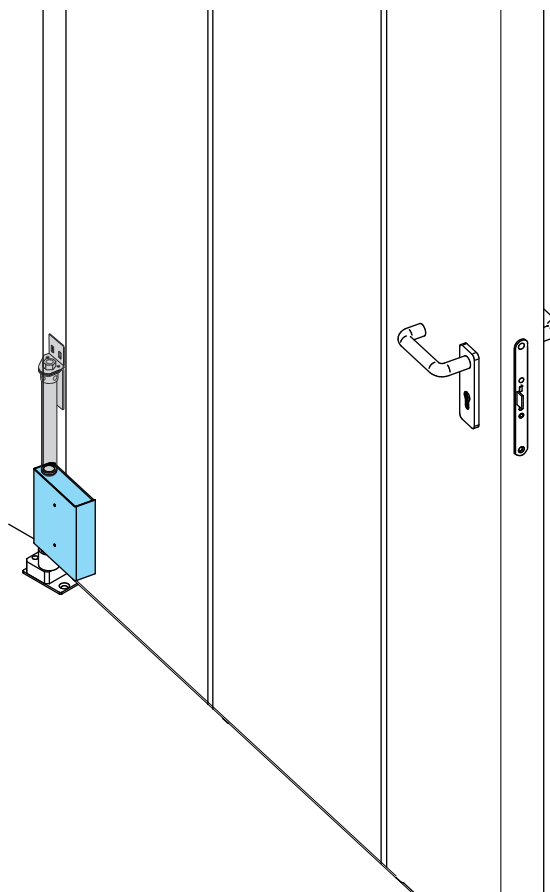

DOOR CLOSER (C)

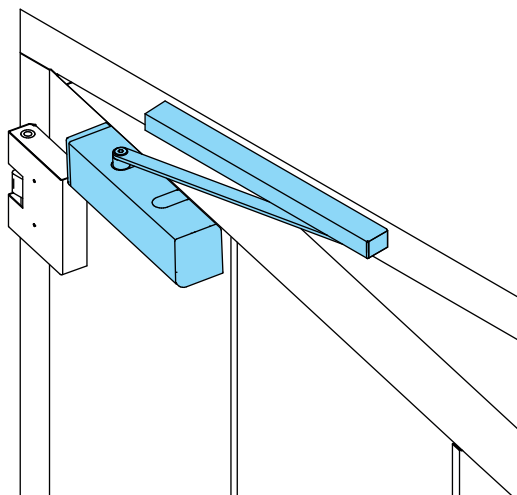


CONTINUE →

EASY OPENING DEVICE


EXUS PUSH BAR

Standard execution with aluminum bar and black plastic cover.
Also available in brushed stainless steel.

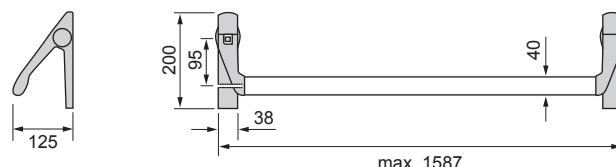


SLASH PUSH BAR

Standard execution with aluminum bar and black plastic cover.
Also available in brushed stainless steel.

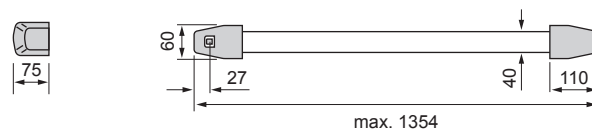

TWIST PUSH BAR

Standard execution with aluminum bar and black plastic cover.

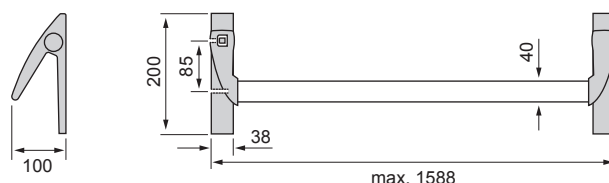

NB: Use of the rotating door on escape routes is at the customer's risk. The easy opening devices are suitable for both mobile or fixed leaves with a maximum size of 2000x3000 mm and a mass up to 300 kg.

CONTROLLED OPENING SYSTEMS

Upon specific request, the rotation door can be supplied with the following controlled opening systems:

Multivoltage electric handle combined with handle or with easy opening device (push handle)

Electromagnet with 300 kg holding force in combination with handle or with easy opening device equipped with microswitch (push handle)