




FULCRA

A new dimension



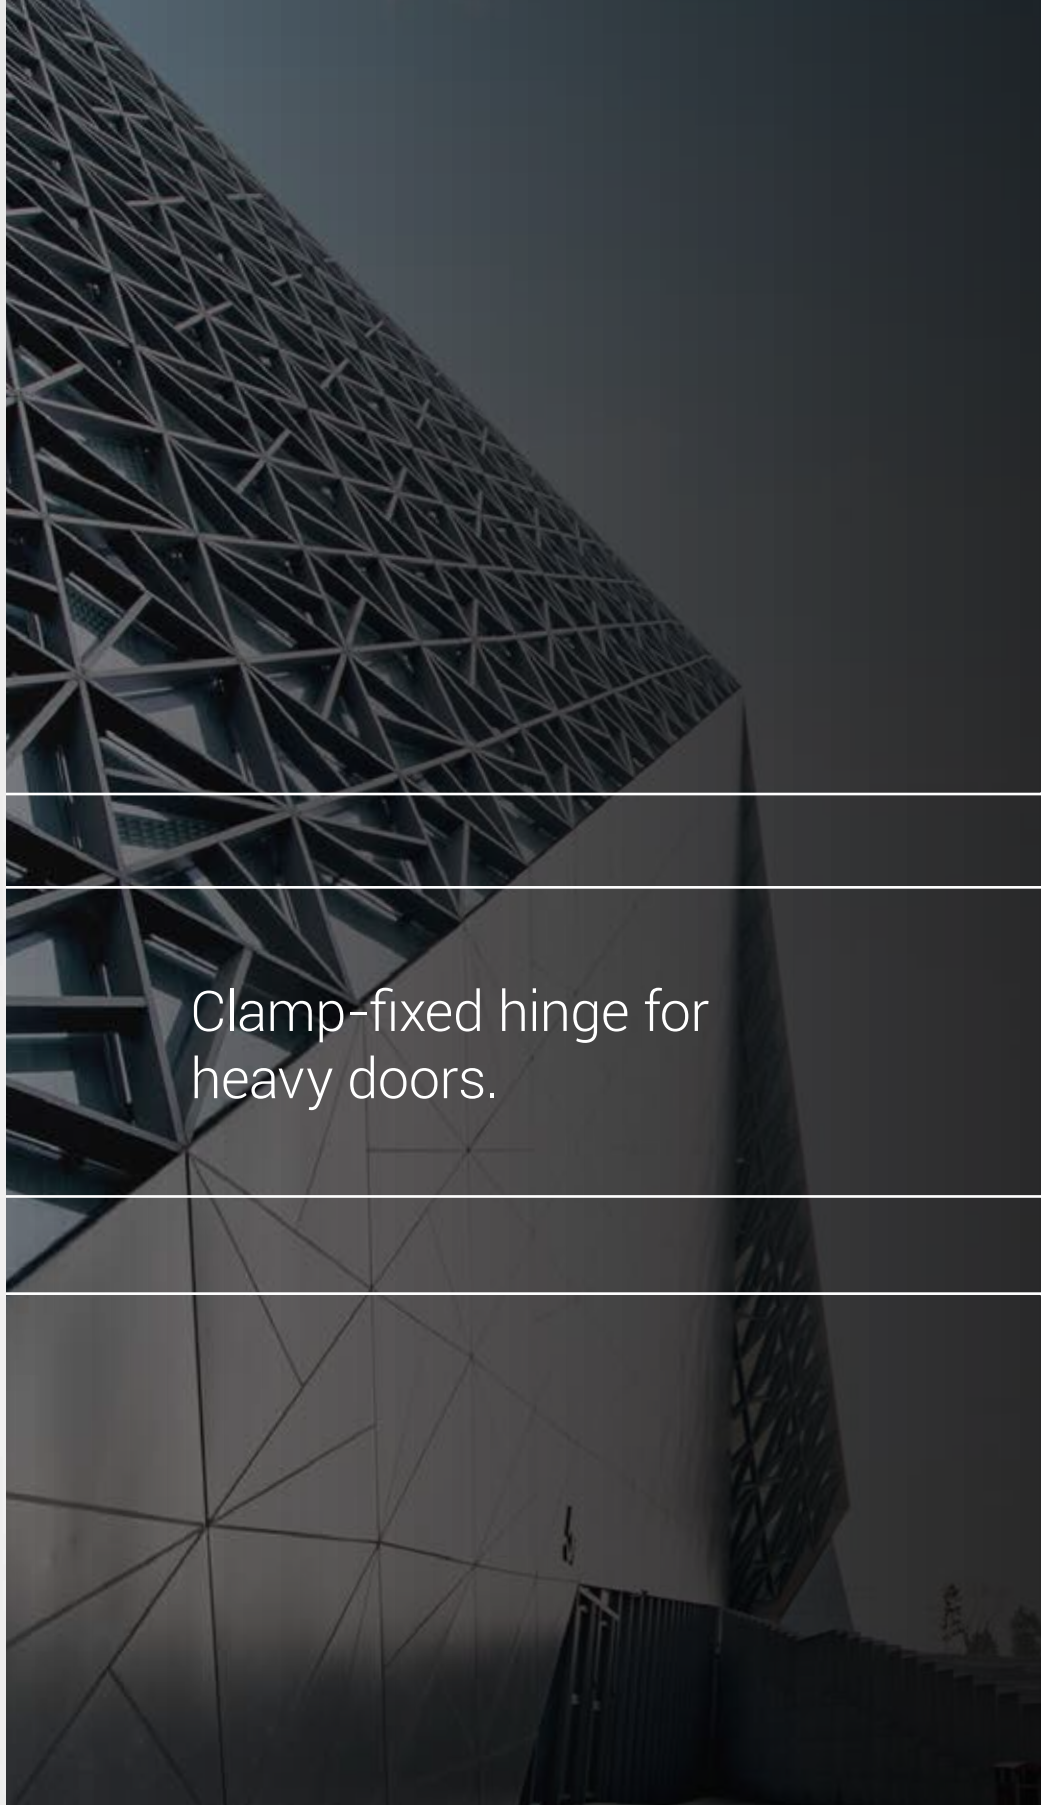

Clamp-fixed hinge for
heavy doors.

FULCRA WATCH THE VIDEO





For heavy duty and intensive use doors, in compliance with european standards

Adjustable in three dimensions: side, height and pressure, all easily accessible directly on the hinge

Innovative patented system to keep the hinge bodies aligned regardless of side adjustment position

Perfect coaxial alignment of the hinge bodies, even with maximum available side adjustment in place

Available in painted and anodised finishes

FULCRA FEATURES

SIMPLE

Parts are fixed without any machining of the profile, by means of steel plates inserted in the channel. **The assembly of the hinge and adaptation for right/left hand opening are accomplished in just a few seconds.**



ADJUSTABLE

Lateral = +/- 2 mm
Height = 0/+3 mm
Compression = +/- 0,5 mm

3D adjustment with Allen key, without additional components.



STRONG

Fulcra allows sashes up to **120 kg with 2 hinges** and up to **150 kg with 3 hinges**.



CE COMPLIANT

Fulcra hinges conforms to EN 1935:2004 European standard **and it is tested at 200.000 cycles.**



PATENTED

Developed, designed and produced in Italy.



FULCRA BENEFITS

FULCRA RANGE

FULCRA	Series	LINEA 3D
00700	European groove	00568N
00701	R40	00571N
00702	European groove with outward opening	00573N
00703	ALU 16	00575V

Fulcra comes with raw finish or several different options like RAL powder paint, anodized paint or TREND special colours.

TREND



350 - Trend Cromosat



325 - Trend Nickelsat



410 - 9010 Pure white




530 - Matte grey



500 - RAL 9005 Black

FULCRA RANGE

A GLOBAL PARTNER

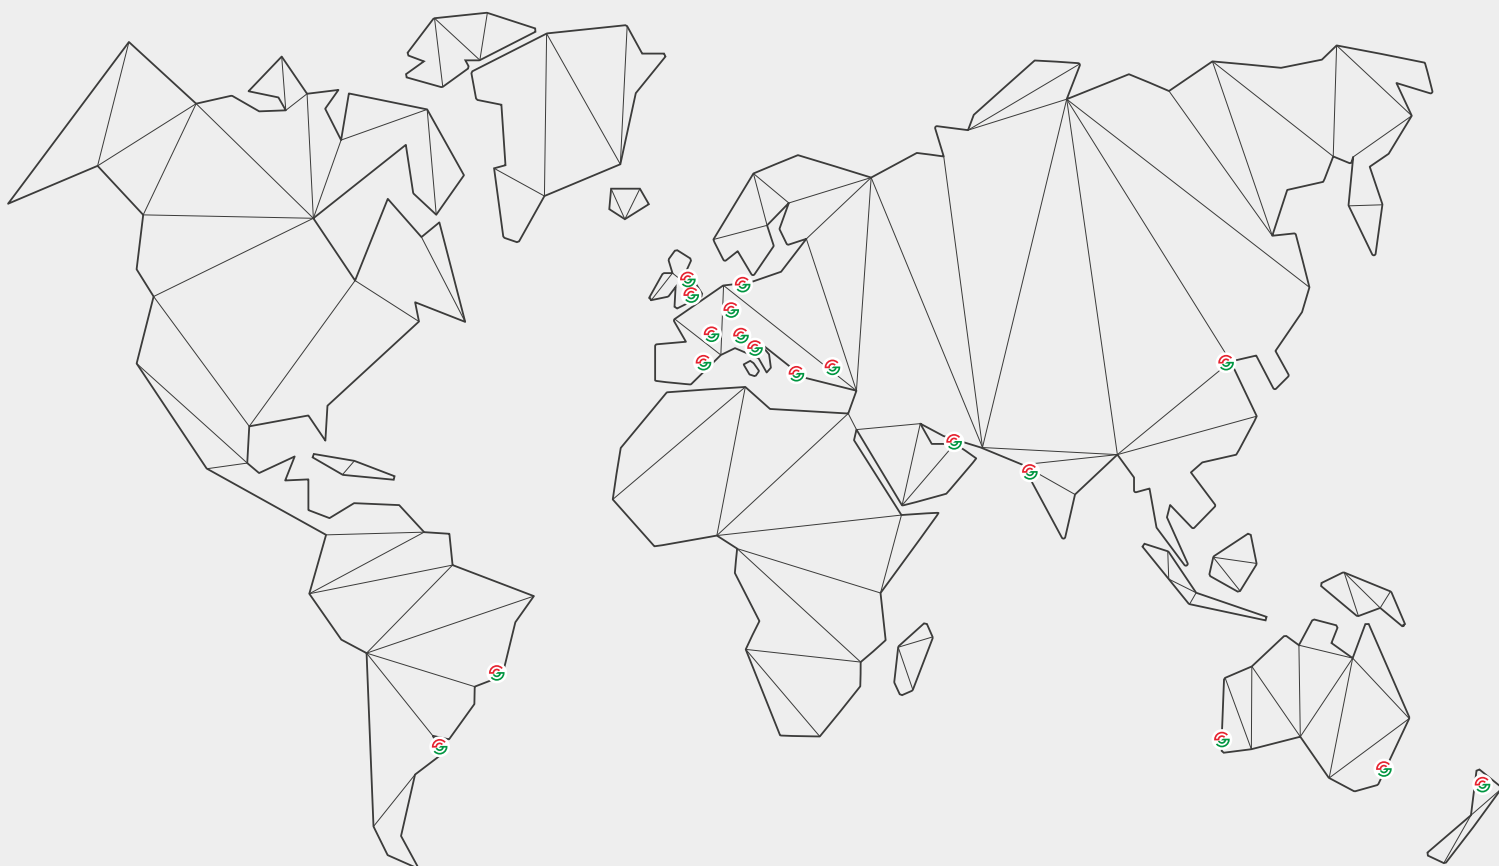

SCHLEGELGIESSE

MADE FOR THE FUTURE

GIESSE S.p.A.

Via Tubertini 1, 40054 Budrio (BO), Italia

Tel: +39 051 8850000 • Fax: +39 051 8850001 • email: info.it@schlegelgiesse.com

www.schlegelgiesse.com



U0903001 - 09/2020